

SeaNest

USER MANUAL

RE-CAPTURE SOLUTION



An aerial photograph of a boat's wake in the ocean, showing the churning water and white foam of the wake against the darker blue of the sea. The image is used as a background for the table of contents page.

TABLE OF CONTENTS

PREPARATION	4
ATTACH TO SEANEST	9
PULL-UP ROPE FOR NET BAG	12
LAUNCH	13
LIFTING UP THE SYSTEM	15

Preparation



Figure 01

Remove transport bands



Figure 02

Preparation



Figure 03

Place the ropes (figure 03.)



Figure 04



Figure 05

Turn the top part (figure 04 and 05.)

Preparation



Figure 06

Prepare for connection of SeaNest to the Re-capture solution (figure 06)

Preparation



Figure 07

Open SeaNest and place bottom plate (weight plate) inside the net (figure 7)

Make sure that you have the two ropes (delivered as separate) for connecting the bottom plate (weight plate)

Preparation



1. Make a knot on one end of the rope
2. Guide the rope through the bottom plate.



3. Further under the metal pole.



4. And up through the plate on the other side.




Tighten the rope so that the plate is tight to the metal pole and secure with a knot.


Preparation



Tighten the rope so that the plate is tight to the metal pole and secure with a knot as shown on figure.

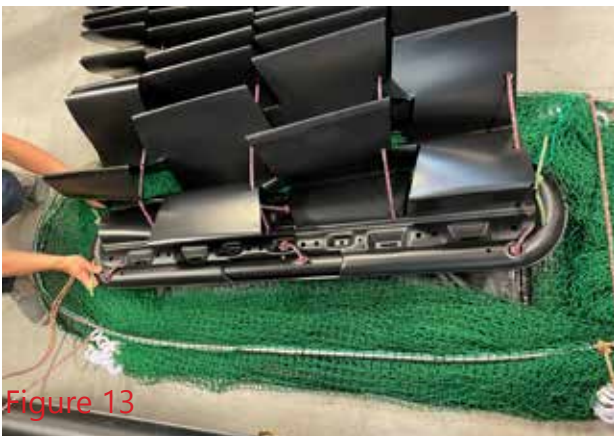

Repeat the connection of the bottom plate to the metal pole also on the other end.

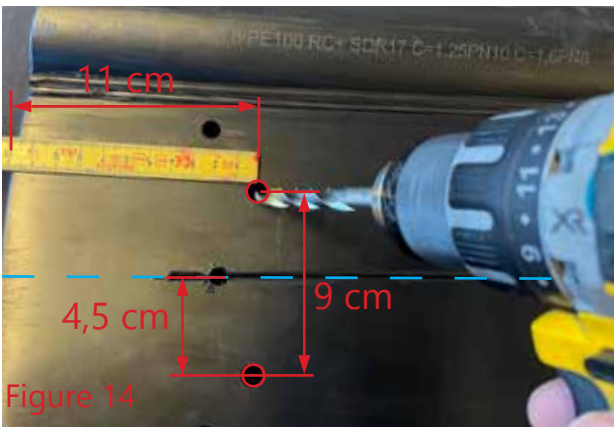

For early model (2018) of the SeaNest, please follow the step to drill extra holes for connecting the plate to the metal pole.

Attach to SeaNest



Figure 15

Place SeaNest as shown on figure 16, and make sure the ropes are "free".

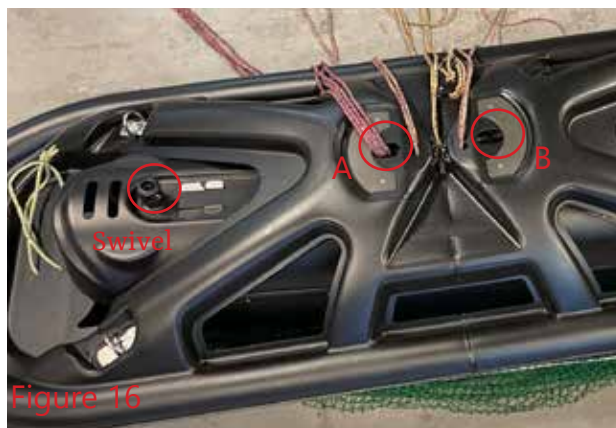


Figure 16

Attach to SeaNest



The 4 ropes from SeaNest are being thread through hole (A), on swivel side.



Pull all ropes towards you before placing the Re-Capturing solution on to SeaNest.



Top part of Re-Capuring solution are being connected to SeaNest.



To be centered by lifting SeaNest on both sides at the same time.

Attach to SeaNest



Top part of Re-Capuring solution are in correct position when the 4 ropes from SeaNest are in the centre of hole A.




SeaNest to be secured in position ,figur 22 and 23.



Tighten and secure the ropes as an extra safety.

Pull-Up rope for net bag

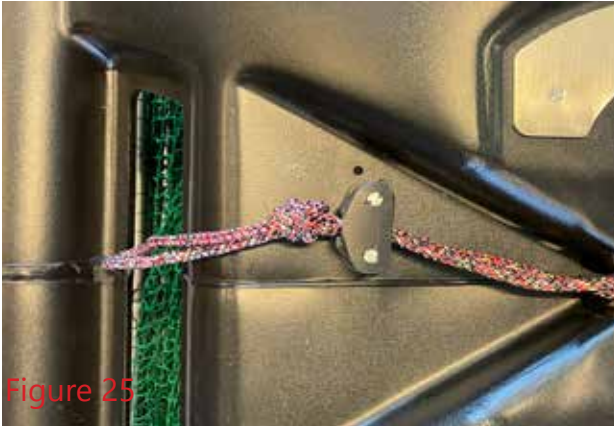

Pull-Up rope position before launching the system.



Press both side of rope lock to release rope.



Pull back the rope before launching the system.
To be done each time, before launching.

Launch



Connect ALL ropes, besides Pull-up rope for net bag.

NB! NOT PULL-Up rope.

Make a double half stitch and connect to the crane, lift the system and place into the sea.





The system are in correct position and the net bag are open, when the ropes are as shown on figure 29.



When it it time to catch the cleaner fish, the operator pulls the Pull-Up rope as shown on figure 30.

Pull-Up time
Closing the system in 20 seconds

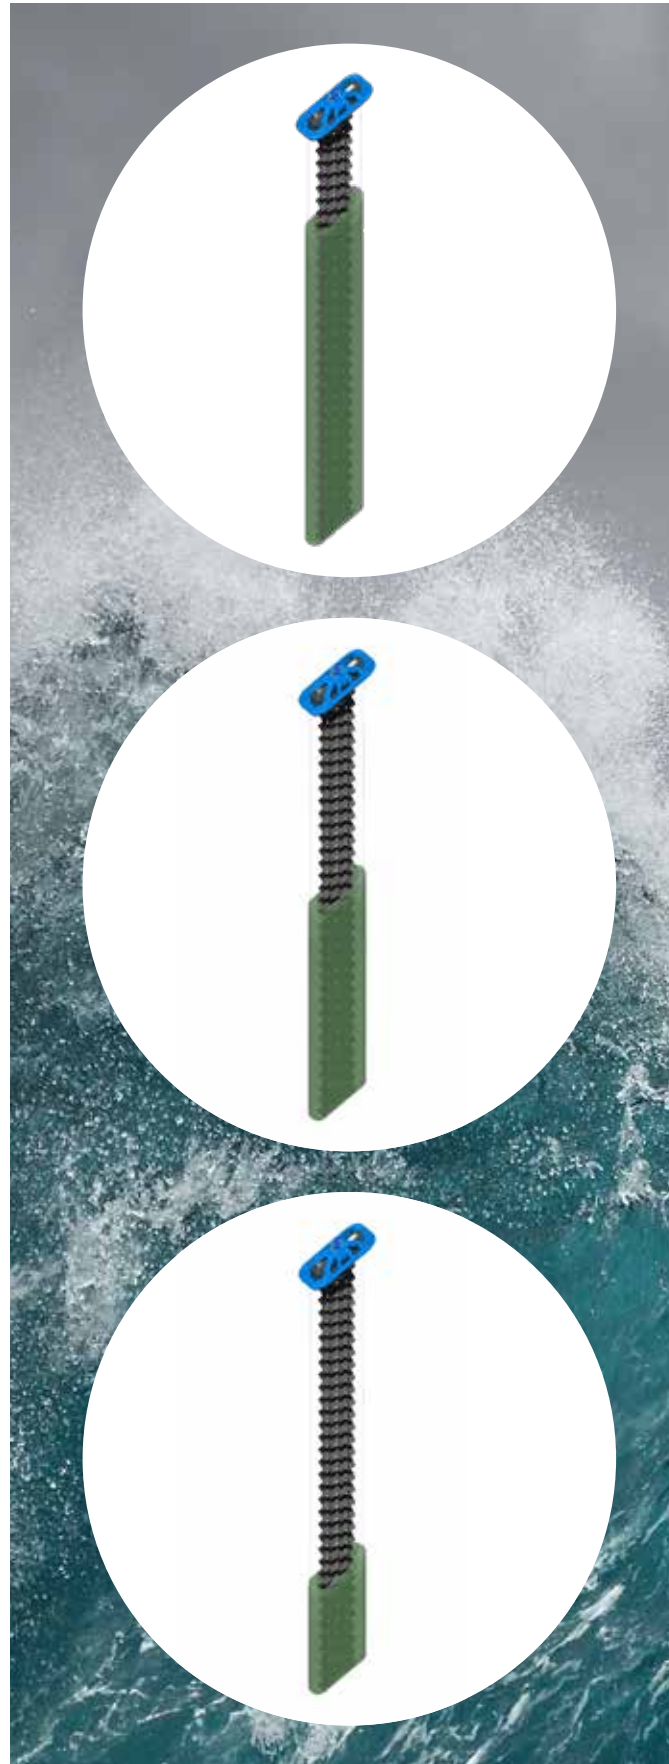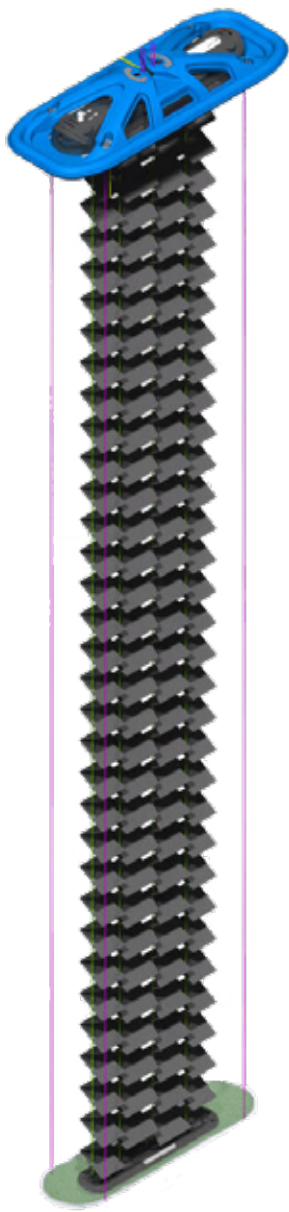

Lifting up the system.



The system is now ready to be lifted.





SeaNest

SeaNest developed and patented by Estro AS

Trond Marøy +47 97718505
Espen Øvreeide +47 90989599

Email: post@estro.no